

E F N O T E D R U M S

E F N O T E 3 / 5 / 7 series

Firmware Update Guide



EN

Firmware update procedure for EFNOTE 3 / 5 / 7 Series

SYSTEM REQUIREMENTS

PC/Mac

Computer equipped with USB port (USB 2.0 high speed or faster)

OS


Microsoft Windows 10

Mac OS 10.13 (High Sierra), or newer

- * For the detailed supported OS information, refer to the EFNOTE website (p. 5).
- * For Windows PC, Intel chipset is recommended.
- * A virtual environment is not supported.
- * Windows running on a Mac is not supported.
- * The USB connectivity is not guaranteed for all environments. Some computers may not be fully compatible.

Checking the current firmware version

Menu > Settings > Option tab > Info



Updating

WARNING

DO NOT SHUT THE SOUND MODULE POWER OFF WHILE UPDATING.

If the power is cut off during the update, there is a risk that the sound module will never turn on. In this case, you will be charged for the repair.

1 Turn the sound module on, and connect the sound module to your PC/Mac with a USB cable.

* A micro-USB cable (not included) is needed to connect.

2 Open the "EFNOTE Update Tool" app.

The app is available on the EFNOTE website. (p. 5)

Windows

If the "Windows protected your PC" message is popped up, click "More info" and "Run anyway".




3 The app starts connecting to the sound module.



When the connection is established, the status shows “Device connected,” and the sound module shows following screen.

* In case failed to connect, quit the app and try again from the step 2.




4 Click [File...] , and select the new firmware file “EFD-x-FIRM-Vxxx.rom” that you downloaded.

* Unzip the downloaded zip file, first.



* If the file you selected is not supported with the sound module, following screen is popped up. Select a correct file.

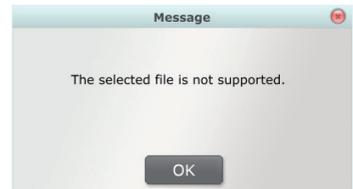

5 Now, ready to update. Click [Execute].



6 The confirmation screen is popped up. Click [Yes] to proceed.



The update starts.

- * Do not shut the sound module power off while updating.
- * Do not try to cancel the update.
- * If you got any trouble with your computer during the update, keep the sound module as it is, and restart your computer. Then, try again from the step 2.




**After the status shows
"Update completed successfully" ...**

7 Close the app.




8 Unplug the AC adapter from the sound module, and plug it again.

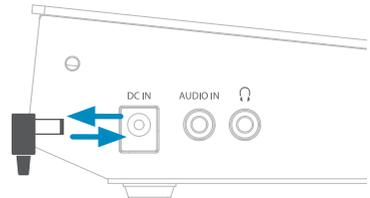


9 Turn the sound module on.

The ring illumination LED starts blinking, and lasts for about 1 minute.
(The screen is not displayed)

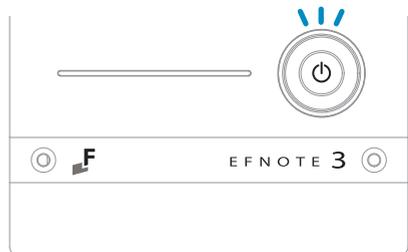

After a while, the display shows following screen.
(This screen may be skipped)



When the process is finished, the home screen is displayed.
The update is completed.

For the latest information, please refer to the EFNOTE website.

ef-note.com



- * Specification and design are subject to change without prior notice.
- * Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation.
- * Mac and macOS are trademarks of Apple Inc., registered in the U.S. and other countries and regions.
- * Company names or product names etc. appearing in this document are the registered trademarks or trademarks of their respective corporate owners.